

# Course 18.327 and 1.130 Wavelets and Filter Banks

**Refinement Equation: Iterative and Recursive Solution Techniques; Infinite Product Formula; Filter Bank Approach for Computing Scaling Functions and Wavelets**

## Solution of the Refinement Equation

$$\phi(t) = 2 \sum_{k=0}^N h_0[k] \phi(2t-k)$$

First, note that the solution to this equation may not always exist! The existence of the solution will depend on the discrete-time filter  $h_0[k]$ .


If the solution does exist, it is unlikely that  $\phi(t)$  will have a closed form solution. The solution is also unlikely to be smooth. We will see, however, that if  $h_0[n]$  is FIR with

$$h_0[n] = 0 \text{ outside } 0 \leq n \leq N$$

then  $\phi(t)$  has compact support:

$$\phi(t) = 0 \text{ outside } 0 < t < N$$

Approach 1 Iterate the box function



$\phi^{(0)}(t)$  = box function on  $[0, 1]$

$$\phi^{(i+1)}(t) = 2 \sum_{k=0}^N h_0[k] \phi^{(i)}(2t - k)$$

If the iteration converges, the solution will be given by

$$\lim_{i \rightarrow \infty} \phi^{(i)}(t)$$


This is known as the cascade algorithm.

3

Example: suppose  $h_0[k] = \{1/4, 1/2, 1/4\}$

$$\phi^{(i+1)}(t) = 1/2 \phi^{(i)}(2t) + \phi^{(i)}(2t - 1) + 1/2 \phi^{(i)}(2t - 2)$$

Then

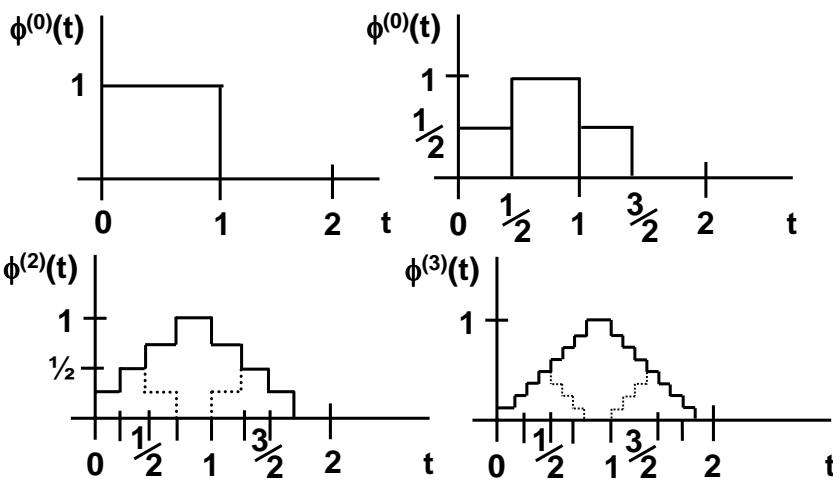

Converges to the hat function on  $[0, 2]$

4

## Approach 2 Use recursion

First solve for the values of  $\phi(t)$  at integer values of  $t$ .

Then solve for  $\phi(t)$  at half integer values, then at quarter integer values and so on.

This gives us a set of discrete values of the scaling function at all dyadic points  $t = n/2^i$ .

At integer points:

$$\phi(n) = 2 \sum_{k=0}^N h_0[k] \phi(2n - k)$$

5

Suppose  $N = 3$

$$\phi(0) = 2 \sum_{k=0}^3 h_0[k] \phi(-k)$$

$$\phi(1) = 2 \sum_{k=0}^3 h_0[k] \phi(2-k)$$

$$\phi(2) = 2 \sum_{k=0}^3 h_0[k] \phi(4-k)$$

$$\phi(3) = 2 \sum_{k=0}^3 h_0[k] \phi(6-k)$$

Using the fact that  $\phi(n) = 0$  for  $n < 0$  and  $n > N$ , we can write this in matrix form as

$$\begin{bmatrix} \phi(0) \\ \phi(1) \\ \phi(2) \\ \phi(3) \end{bmatrix} = 2 \begin{bmatrix} h_0[0] & & & & & & & & \\ & h_0[2] & h_0[1] & h_0[0] & & & & & \\ & & h_0[3] & h_0[2] & h_0[1] & & & & \\ & & & & h_0[3] & & & & \end{bmatrix} \begin{bmatrix} \phi(0) \\ \phi(1) \\ \phi(2) \\ \phi(3) \end{bmatrix}$$

6

Notice that this is an eigenvalue problem

$$\lambda \Phi = A \Phi$$

where the eigenvector is the vector of scaling function values at integer points and the eigenvalue is  $\lambda = 1$ .

Note about normalization:

Since  $(A - \lambda I) \Phi = 0$  has a non-unique solution, we must choose an appropriate normalization for  $\Phi$ . The correct normalization is

$$\sum_n \phi(n) = 1$$

This comes from the fact that we need to satisfy the partition of unity condition,  $\sum_n \phi(x-n) = 1$ .

7

At half integer points:

$$\phi(n/2) = 2 \sum_{k=0}^N h_0[k] \phi(n-k)$$

So, for  $N = 3$ , we have

$$\begin{bmatrix} \phi(1/2) \\ \phi(3/2) \\ \phi(5/2) \end{bmatrix} = 2 \begin{bmatrix} h_0[1] & h_0[0] & & & \\ h_0[3] & h_0[2] & h_0[1] & h_0[0] & \\ & & h_0[3] & h_0[2] & \end{bmatrix} \begin{bmatrix} \phi(0) \\ \phi(1) \\ \phi(2) \\ \phi(3) \end{bmatrix}$$

8

## Scaling Relation and Wavelet Equation in Frequency Domain

$$\phi(t) = 2 \sum_k h_0[k] \phi(2t - k)$$

$$\begin{aligned} \int_{-\infty}^{\infty} \phi(t) e^{-i\Omega t} dt &= 2 \sum_k h_0[k] \int_{-\infty}^{\infty} \phi(2t - k) e^{-i\Omega t} dt \\ &= 2 \sum_k h_0[k] \frac{1}{2} \int_{-\infty}^{\infty} \phi(\tau) e^{-i\Omega(\tau + k)/2} d\tau \\ &= 2 \sum_k h_0[k] e^{-i\Omega k/2} \int_{-\infty}^{\infty} \phi(\tau) e^{-i\Omega\tau/2} d\tau \end{aligned}$$

9

$$\begin{aligned} \text{i.e. } \hat{\phi}(\Omega) &= H_0\left(\frac{\Omega}{2}\right) \cdot \hat{\phi}\left(\frac{\Omega}{2}\right) \\ &= H_0\left(\frac{\Omega}{2}\right) \cdot H_0\left(\frac{\Omega}{4}\right) \cdot \hat{\phi}\left(\frac{\Omega}{4}\right) \\ &\quad \vdots \\ &= \prod_{\omega=1}^{\infty} H_0\left(\frac{\Omega}{2^{\omega}}\right) \hat{\phi}(0) \end{aligned}$$

$$\hat{\phi}(0) = \int_{-\infty}^{\infty} \phi(t) dt = 1 \quad (\text{Area is normalized to 1})$$

10

So

$$\hat{\phi}(\Omega) = \prod_{j=1}^{\infty} H_0\left(\frac{\Omega}{2^j}\right) \quad \text{Infinite Product Formula}$$

Similarly

$$w(t) = 2 \sum_k h_1[k] \phi(2t - k)$$

leads to

$$\hat{w}(\Omega) = H_1\left(\frac{\Omega}{2}\right) \hat{\phi}\left(\frac{\Omega}{2}\right)$$


Desirable properties for  $H_0(\omega)$ :

- $H(0) = 1$ , so that  $\hat{\phi}(0) = 0$
- $H(\omega)$  should decay to zero as  $\omega \rightarrow \pi$ ,

$$\text{so that } \int_{-\infty}^{\infty} |\hat{\phi}(\Omega)|^2 d\Omega < \infty$$

11

### Computation of the Scaling Function and Wavelet – Filter Bank Approach

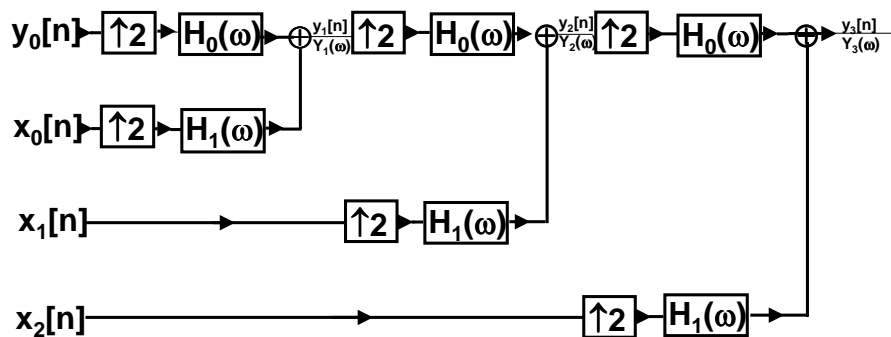

Normalize so that  $\sum_n h_0[n] = 1$ .

12

i. Suppose  $y_0[n] = \delta[n]$  and  $x_k[n] = 0$ .

$$Y_0(\omega) = 1$$

$$Y_1(\omega) = Y_0(2\omega) H_0(\omega) = H_0(\omega)$$

$$Y_2(\omega) = Y_1(2\omega) H_0(\omega) = H_0(2\omega)H_0(\omega)$$

$$Y_3(\omega) = Y_2(2\omega) H_0(\omega) = H_0(4\omega) H_0(2\omega) H_0(\omega)$$

After K iterations:

$$Y_K(\omega) = \prod_{k=0}^{K-1} H_0(2^k\omega)$$

What happens to the sampling period?

Sampling period at input =  $T_0 = 1$  (say)

Sampling period at output =  $T_K = 1/2^K$

13

Treat the output as samples of a continuous time signal,  $y_K^c(t)$ , with sampling period  $1/2^K$ :

$$y_K[n] = \frac{1}{2^K} y_K^c(n/2^K)$$

$$\Rightarrow Y_K(\omega) = \hat{Y}_K^c(2^K\omega) \quad ; \quad -\pi \leq \omega \leq \pi$$

( $y_K^c(t)$  is chosen to be bandlimited)

Replace  $2^K\omega$  with  $\Omega$ :

$$\hat{Y}_K^c(\Omega) = Y_K(\Omega/2^K) = \prod_{k=0}^{K-1} H_0(\Omega/2^{K-k}) = \prod_{j=1}^K H_0(\Omega/2^j) \quad ;$$

$$-2^K\pi \leq \Omega \leq 2^K\pi$$

So

$$\lim_{K \rightarrow \infty} \hat{Y}_K^c(\Omega) = \prod_{j=1}^{\infty} H_0(\Omega/2^j) = \hat{\phi}(\Omega)$$

14

⇒  $2^K y_k[n]$  converges to the samples of the scaling function,  $\phi(t)$ , taken at  $t = n/2^K$ .

ii. Suppose  $y_0[n] = 0$ ,  $x_0[n] = \delta[n]$  and all other  $x_k[n] = 0$

$$Y_K(\omega) = H_1(2^{K-1}\omega) \prod_{k=0}^{K-2} H_0(2^k\omega)$$

Then

$$\begin{aligned} \hat{Y}_K^c(\Omega) &= Y_K(\Omega/2^K) = H_1\left(\frac{\Omega}{2}\right) \prod_{k=0}^{K-2} H_0(\Omega/2^{K-k}) \\ &= H_1\left(\frac{\Omega}{2}\right) \prod_{j=1}^{K-1} H_0\left(\frac{1}{2} \cdot \frac{\Omega}{2^j}\right) \end{aligned}$$

So

$$\lim_{K \rightarrow \infty} \hat{Y}_K^c(\Omega) = H_1(\Omega/2) \hat{\phi}(\Omega/2) = \hat{w}(\Omega)$$

⇒  $2^K y_k[n]$  converges to the samples of the wavelet,  $w(t)$ , taken at  $t = n/2^K$ .

15

### Support of the Scaling Function



$$\text{length}\{v[n]\} = 2 \cdot \text{length}\{y_{k-1}[n]\} - 1$$

Suppose that

$$h_0[n] = 0 \text{ for } n < 0 \text{ and } n > N$$

$$\begin{aligned} \Rightarrow \text{length}\{y_k[n]\} &= \text{length}\{v[n]\} + \text{length}\{h_0[n]\} - 1 \\ &= 2 \cdot \text{length}\{y_{k-1}[n]\} + N - 1 \end{aligned}$$

Solve the recursion with  $\text{length}\{y_0[n]\} = 1$

So

$$\text{length}\{y_k[n]\} = (2^K - 1)N + 1$$

16




i.e.  $\text{length} \{y_K^c(t)\} = T_K \cdot \text{length} \{y_K[n]\}$

$$= \frac{(2^K - 1)N + 1}{2^K}$$

$$= N - \frac{N-1}{2^K}$$


$\lim_{K \rightarrow \infty}$

$$\text{length} \{\phi(t)\} = N$$

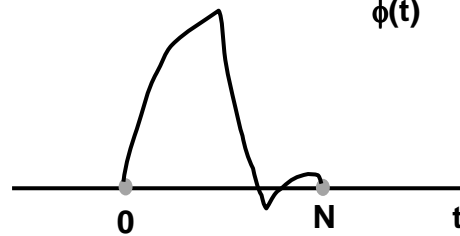

So the scaling function is supported on the interval [0, N]

17

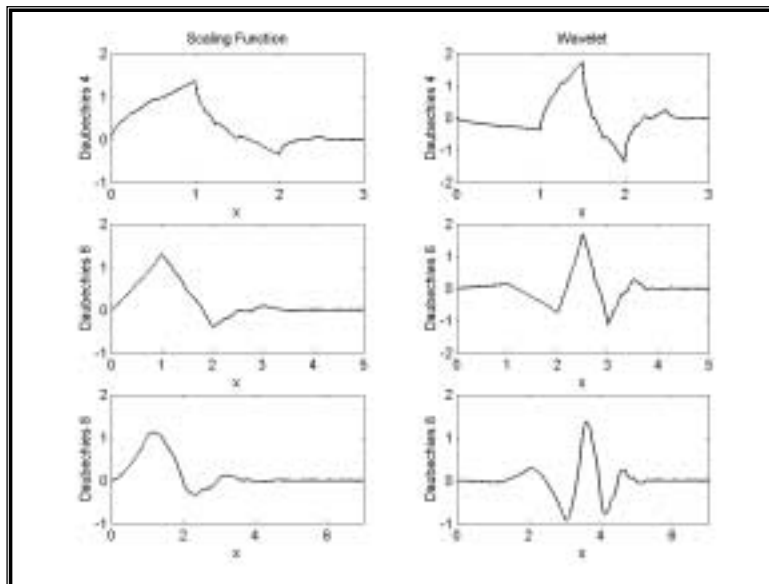

18

# Matlab Example 6

Generation of orthogonal scaling functions and wavelets




MATLAB M-file




MATLAB M-file

## By Inverse DWT

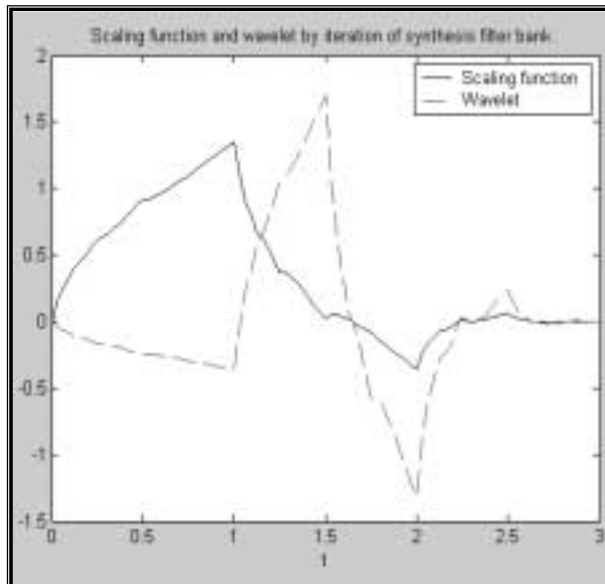


20

## By Recursion

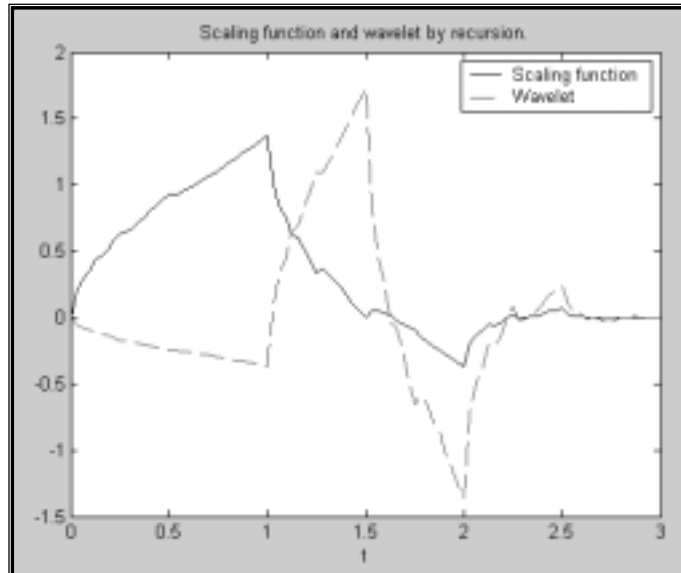

21

## Comparison

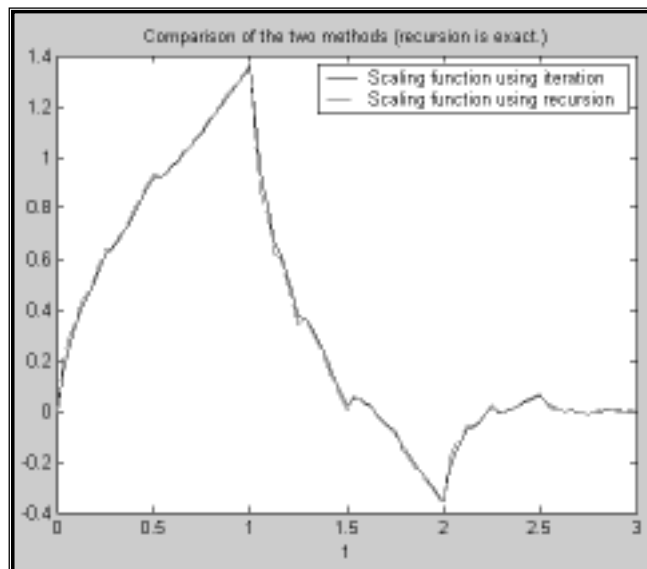

22


# Matlab Example 7

Generation of biorthogonal scaling functions and wavelets.



MATLAB M-file

## Primary Daub 9/7 Pair

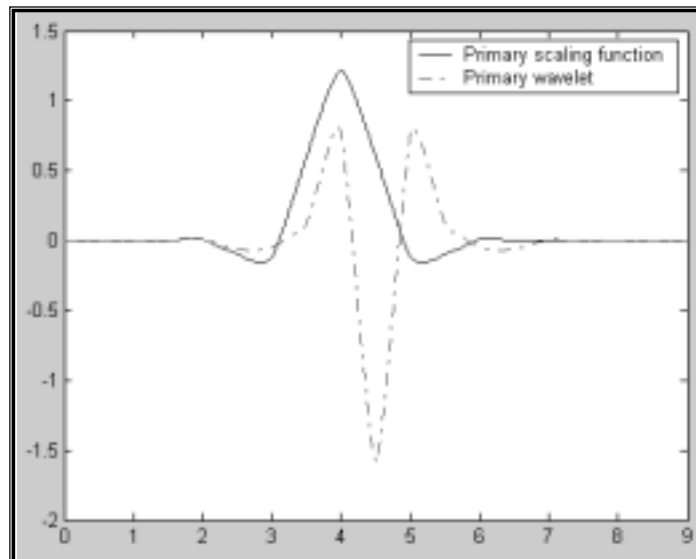

24

# Dual Daub 9/7 Pair

